

MT-410

*For low viscosity materials such as
instantaneous adhesive agent*
Optimum for high-precision dispensing in small amount



Simple tube setting

- High precision dispensing without troublesome adjustment, easily feasible by anybody.

Elimination of liquid drip

- Liquid drip eliminated and bubble generation reduced even for low-viscosity liquid materials.

Simple Maintenance

- Only tube for liquid-exposed section.

- Long life of liquid material feeding tube thanks to our original tube installation mechanism.
- "Digital Timer" allowing for dispensing time setting with simple operation equipped.
- A dispensing pen with a remote switch for manual work (option) is available.



Simple and secure tube placement achieved

SPECIFICATIONS

Item name	Rotary-type tubing dispenser
Model	MT-410
Dispensing method	Rotary tubing system
Dispensing mode	Timed mode/manual mode
Dispensing time setting range	0.01 to 99.99s
Range of rotational speed setting	0 to 120rpm
Input signal	External dispensing signal
Output signal	Dispensing completion signal
Rated power supply and frequency	AC 100 to 240 V, 50/60 Hz
Power consumption	25 W
Compatible standards	CE-marking (EMC and low voltage directives), EU RoHS
External dimensions	W188xD208xH75mm (projection portion excluded)
Weight	3.0kg


APPLICABLE DISPENSING MATERIALS

Anaerobic low viscosity materials (such as instantaneous adhesive & UV hard-type adhesive) low viscosity epoxy resin, silicone oil, etc.

APPLICATIONS

Adhesion, potting, coating, dot dispensing, line dispensing, injection, filling, etc.

EXTERNAL DIMENSION DRAWINGS

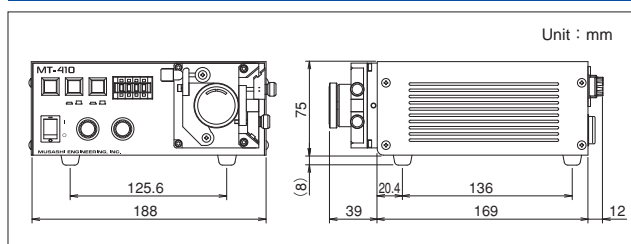

Dispensing pen for tubing dispenser



Item name	Model	Code length
Dispensing pen [LS-NH3 type16 4pin]	LS-NH3-1604P	1m

LIST OF PTFE TUBES

A wide range of tubes is available to meet your liquid viscosity and dispensing volume needs.

Use our black PTFE tube if you will be dispensing UV cured material.

PTFE tubes for tubing dispenser			
Model name	Tube outside diameter(φ)	Tube inside diameter(φ)	Tube length
TT-32	0.75	0.25	10m
TT-30	0.76	0.30	10m
TT-28	0.84	0.38	10m
TT-26	0.92	0.46	10m
TT-24	1.06	0.56	10m
TT-22	1.18	0.68	10m
TT-21	1.31	0.81	10m
TT-20	1.46	0.86	10m
TT-19	1.56	0.96	10m
TT-18	1.67	1.07	10m
TT-17	1.79	1.19	10m
TT-16	1.95	1.35	10m
TT-15	2.10	1.50	10m
TT-14	2.28	1.68	10m
TT-13	2.53	1.93	10m
TT-12	2.76	2.16	10m
TT-11	3.01	2.41	10m
TT-10	3.29	2.69	10m

Black PTFE tubes for tubing dispenser (for UV curing materials)			
Model name	Tube outside diameter(φ)	Tube inside diameter(φ)	Tube length
TT-30B	0.76	0.30	10m
TT-28B	0.84	0.38	10m
TT-26B	0.92	0.46	10m
TT-24B	1.06	0.56	10m
TT-22B	1.18	0.68	10m
TT-21B	1.31	0.81	10m
TT-20B	1.46	0.86	10m
TT-19B	1.56	0.96	10m
TT-18B	1.67	1.07	10m
TT-17B	1.79	1.19	10m
TT-16B	1.95	1.35	10m
TT-15B	2.10	1.50	10m
TT-13B	2.53	1.93	10m
TT-12B	2.76	2.16	10m
TT-11B	3.01	2.41	10m
TT-10B	3.29	2.69	10m



Safety precaution

For your safety, be sure to read the instruction manual before using the unit.

* We reserve the right to change the specifications without notice.

* All copyrights are retained by MUSASHI ENGINEERING.

Reprinting, reproducing, and/or transmitting these materials as electronic data in whole or part is strictly prohibited without prior written permission.

MUSASHI
ENGINEERING,
INC. is certified
and registered
according to
ISO14001



MUSASHI
ENGINEERING, INC.

<http://www.musashi-engineering.co.jp/english/>

World Leading Dispenser

MUSASHI ENGINEERING, INC.

HEAD OFFICE

8-7-4, Shimorenjaku, Mitaka, Tokyo, 181-0013, Japan TEL : (81)422-76-7111 / FAX : (81)422-76-7122

BRANCH

TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

SINGAPORE

114 Lavender Street CT Hub 2 #08-88/89 Singapore 338729
TEL : (65)6258-2422 / FAX : (65)6258-4844

THAILAND

No.12 Soi Bangna-Trad 25, Bangna, Bangkok 10260 Thailand
TEL : (66)2-769-5708 / FAX : (66)2-769-5450

INDONESIA

Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia
TEL : (62)21 8990 5005 / FAX : (62)21 8990 5004

GERMANY

Leopoldstrasse 244, 1.Stock 80807 Munich Germany
TEL : (49)89 208039 470 / FAX : (49)89 208039 478

KOREA

902 No. 9 F. #C, Korea Bio Park, 694-1 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do 463-400, Korea
TEL : (82)31-702-3811 / FAX : (82)31-702-3881

TAIWAN

8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070
TEL : (886)3-572-9200 / FAX : (886)3-572-9300

US Integrator and representative



Izumi International, Inc.

1 Pelham Davis Circle, Greenville, SC 29615 USA

Tel: 864-288-8001 Fax: 864-288-7272

E-mail: us-sales@izumiinternational.com

Web: www.izumiinternational.com