

NEW


Best suited for dispensing
Ag paste and solder paste

No clogging of nozzle, high-speed and Stable dispensing of high viscosity particle-filled paste

《Significant reduction in running cost!》

- ◆ “Using up” materials ⇒ Material cost reduction
- ◆ Easy syringe replacement ⇒ Downtime reduction
- ◆ Remarkably longer-lived consumables
⇒ Maintenance loss reduction
- ◆ **Newly Developed** Synchro speed™ function equipped
⇒ Adjustment time loss reduction

Applicable fluid materials Solder paste, Ag paste, and so on.

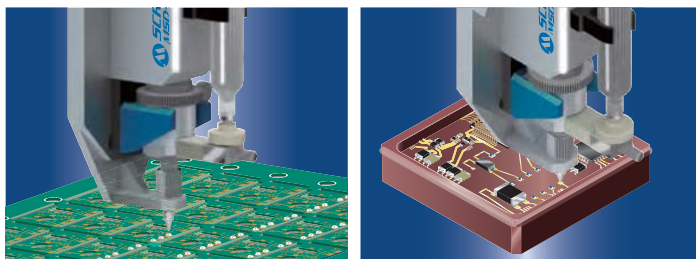

Min. diameter **φ0.15mm**

Dispensing speed **4× faster***

* compared to our air pulse types



PAT.P


Specifications

Item name		High performance screw dispenser SCREW MASTER3		
Model		MSD-3-SET1	MSD-3-SET2	MSD-3-SET3
Dispensing method		Screw type		
Main functions		High-speed dispensing of high viscosity pastes, particle-filled pastes, and so on.		
Applicable fluid materials		Solder paste, Ag paste, epoxy resin, grease, and more		
Liquid feeding method		Syringe (for 5 - 70mL), tank	Syringe (for 5 - 50mL)	Sealant cartridge, barrel cartridge, tube cartridge
Dispensing mode		Timed, manual		
Dispensing time setting range		0.01 to 999.999s		
Quantity of channels		400 channels		
External input signal		Dispensing signal, Setup signal, Dispense mode switching signal, Error reset signal, Channel switching signal.		
External output signal*		Dispensing signal, Completed dispensing signal, Busy signal, Setup signal, Completed auto-increment signal, Error signal and Power-on signal.		
Other functions		Suck back, multi-preset, auto increment, Synchro speed™, RS-232C communication, Language selection (Japanese or English)		
Rated power supply and frequency		100 to 240 VAC (50/60 Hz)		
Power consumption		45 W		
External dimensions	Dispensing head unit	W37×D85×H230.5mm (excluding protrusion)	W37×D100×H230.5mm (excluding protrusion)	
	Controller section	W300×D250×H100mm (excluding protrusion)		
Weight	Dispensing head unit	1 kg (liquid and liquid container excluded)		
	Controller section	5.2 kg		
Compatible standards		CE-marking (LVD, EMC), EU RoHS		

*Usable one of two signals, the in-dispensing output or the dispensing complete output.




■ Dispensing head unit (for the case of MSD-3-SET1)

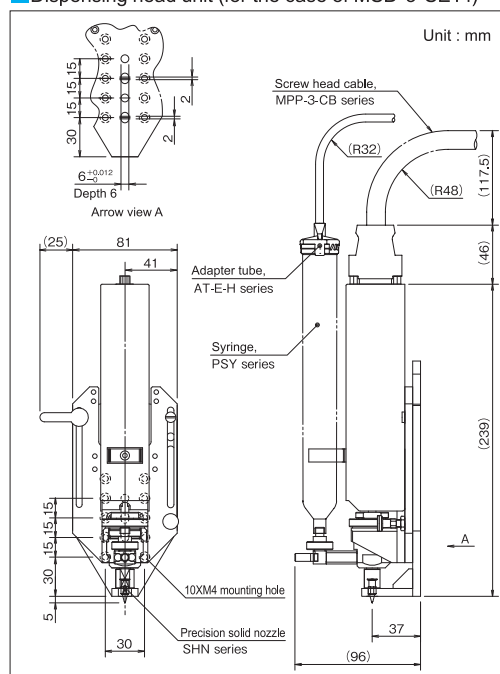

Dimensions

Controller section

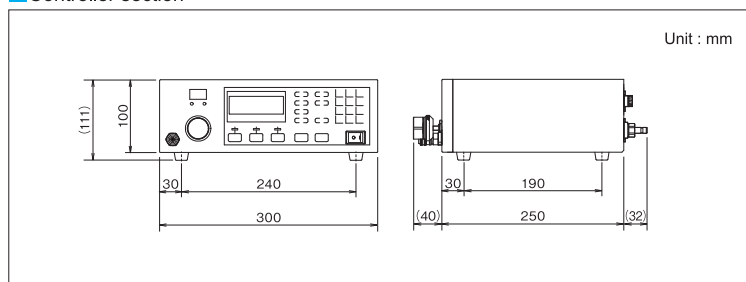

Note : We reserve the right to change the specifications and appearance without notice.



World Leading Dispenser
MUSASHI ENGINEERING, INC.

HEAD OFFICE

8-7-4, Shimorenjaku, Mitaka, Tokyo, 181-0013, Japan TEL : (81)422-76-7111 / FAX : (81)422-76-7122

BRANCH

TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

SINGAPORE 114 Lavender Street CT Hub 2 #08-88/89 Singapore 338729

TEL : (65)6258-2422 / FAX : (65)6258-4844

THAILAND No.12 Soi Bangna-Trad 25, Bangna, Bangkok 10260 Thailand
TEL : (66)2-769-5708 / FAX : (66)2-769-5450

INDONESIA Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi
17550, Jawa Barat, Indonesia
TEL : (62)21 8990 5005/ FAX : (62)21 8990 5004

GERMANY Leopoldstrasse 244, 1.Stock 80807 Munich Germany
TEL : (49)89 208039 470 / FAX : (49)89 208039 478

KOREA 902 No. 9 F. #C, Korea Bio Park, 694-1 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do 463-400, Korea
TEL : (82)31-702-3811 / FAX : (82)31-702-3881

TAIWAN 8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070
TEL : (886)3-572-9200 / FAX : (886)3-572-9300

US Integrator and representative

Izumi International, Inc.

1 Pelham Davis Circle, Greenville, SC 29615 USA

Tel: 864-288-8001 Fax: 864-288-7272

E-mail: us-sales@izumiinternational.com

Web: www.izumiinternational.com

