

SuperJet™

MJET-S

*Ultra-high-speed and
Ultra-micro-deposit
Highest elevation of
Jet dispensing*

Newly
developed



Ultra-high-speed

Max : 1,200Hz

Micro-deposit

No more than 0.5 nL/shot

High-precision

No more than $\pm 1\%$



[Application examples]

- Conformal coating
- Underfill dispensing
- Silicone-based liquid dispensing
- Tab reinforcement
- Smartphone cover adhesive

Specifications

Product name	NON-CONTACT JET DISPENSER SUPERJET	
Model	MJET-S	
Dispense controller's model	MJET-S-CTR	
Dispensing system	Jet system	
Control system	Microcomputer digital control system	
Applicable liquid materials	UF material, Ag paste, sealant, epoxy resin, grease etc.	
Applicable syringe	5, 10, 20, 30, 50 or 70 mL syringe	—
Applicable tank	—	Tank
Temperature setting range	MAX : 80 °C	
Dispensing modes	LINE/MAN, LINE/SET, DOT/MAN, DOT/SET	
Dispensing time setting range	0.25 - 9999.99 ms (ON time/OFF time both)	
Shot count setting range	1 - 99999999	
Main functions	Synchro Speed™, multi-channel presets, Japanese-English display switch, abnormal pressure supply warning	
Channel number	100 channels	
RS-232C serial communication	Available	
Input signals	Dispensing, channel switching, dispensing mode switching	
Output signals	Dispensing completion, in-dispensing, dispensing completion/in-dispensing (switchable), temperature control completion, busy, alarm, a low pressure, error, main mode status, sub mode status, power on	
Rated voltage and frequency	AC100 to 240V	50/60 Hz
Power consumption	220 W	
Conformity standards	EU RoHS	
Dispense head unit dimensions W*D*H	W29 x D87x H102 mm (excluding protrusions)	W31 x D95 x H166 mm (excluding protrusions)
Weight of dispense head unit	0.5 kg	
Dispense controller dimensions W*D*H	W300 x D250 x H107 mm (excluding protrusions)	
Weight of dispense controller	5.4 kg	

Outside drawings

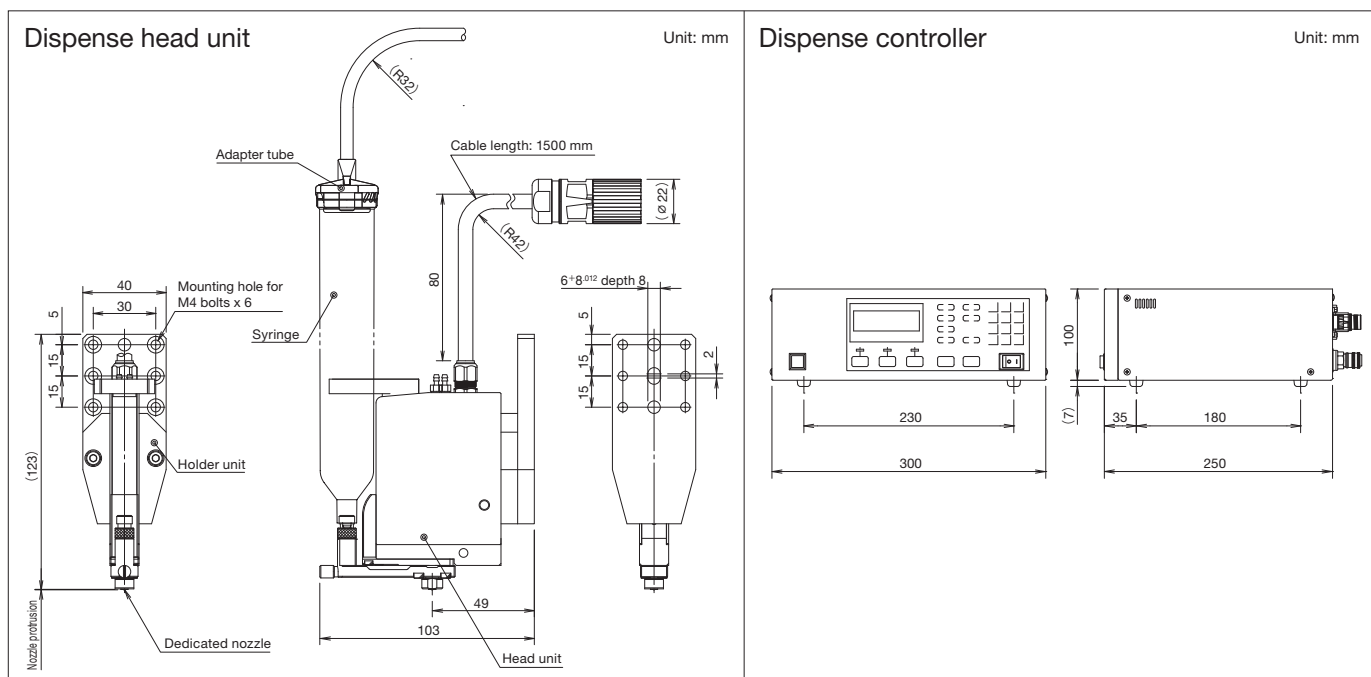

World Leading Dispenser
MUSASHI ENGINEERING, INC.

HEAD OFFICE
8-7-4, Shimorenjaku, Mitaka, Tokyo, 181-0013, Japan TEL : (81)422-76-7111 / FAX : (81)422-76-7122
BRANCH
TOKYO, OSAKA, NAGOYA, SENDAI, FUKUOKA, SAITAMA, NAGANO, EAST-KANTO, AKITA, KANAZAWA

MUSASHI ENGINEERING, INC. is certified and registered according to ISO14001 ENVIRONMENTAL MANAGEMENT.



<http://www.musashi-engineering.co.jp/english/>

SINGAPORE 114 Lavender Street CT Hub 2 #08-88/89 Singapore 338729
TEL : (65)6258-2422 / FAX : (65)6258-4844
THAILAND No.12 Soi Bangna-Trad 25, Bangna, Bangkok 10260 Thailand
TEL : (66)2-769-5708 / FAX : (66)2-769-5450
INDONESIA Jl. MH. Thamrin, Robson Square, Block A-15, Lippo Cikarang, Bekasi 17550, Jawa Barat, Indonesia
TEL : (62)21 8990 5005/ FAX : (62)21 8990 5004
GERMANY Leopoldstrasse 244, 1.Stock 80807 Munich Germany
TEL : (49)89 208039 470 / FAX : (49)89 208039 478
KOREA (902 No. 9F, #C, Korea Bio Park) 700, Daewangpangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do 13488, Korea
TEL : (82)31-702-3811 / FAX : (82)31-702-3881
TAIWAN 8F-2, No. 158, Sec. 2, Gongdao 5th Road, Hsinchu, Taiwan 30070
TEL : (886)3-572-9200 / FAX : (886)3-572-9300

US Integrator and representative



Izumi International, Inc.
1 Pelham Davis Circle, Greenville, SC 29615 USA
Tel: 864-288-8001 Fax: 864-288-7272
E-mail: us-sales@izumiinternational.com
Web: www.izumiinternational.com